
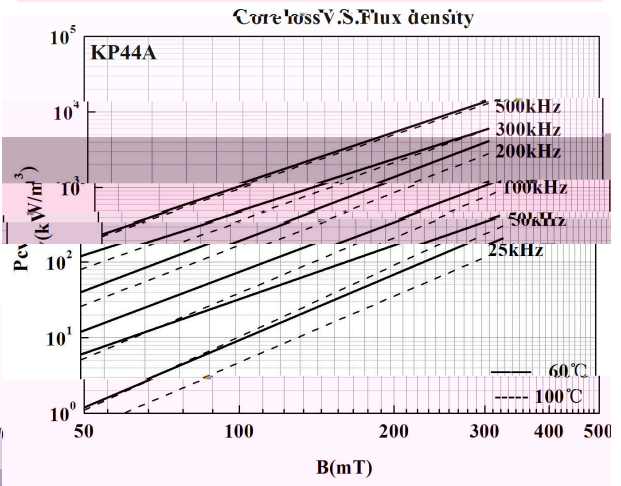
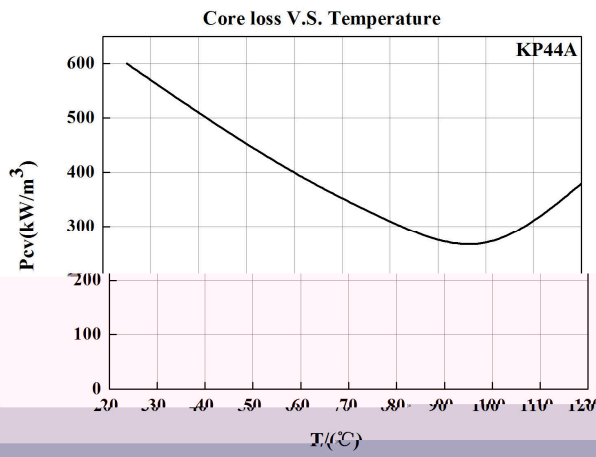
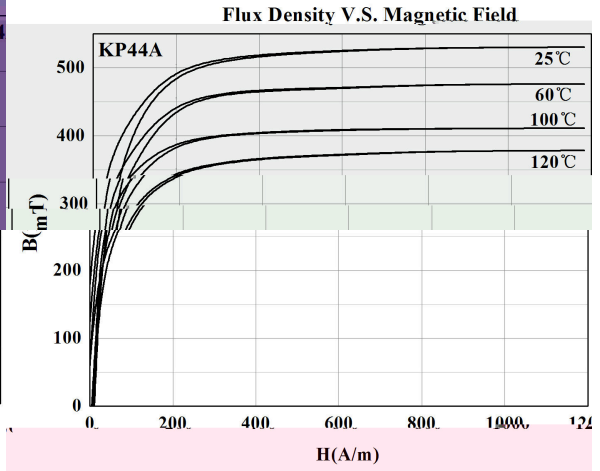


## KP44A 材料特性

### Material Characteristics

特性 Symbol	单位 Unit	测试条件 Conditions		典型值 Value
初始磁导 $\mu_i$ Initial permeability ( $\pm 25\%$ )		25°C		2400
饱和磁感应强度 $B_s$ Saturation flux density	mT	60 Hz 1194 A/m	25°C	525
			100°C	420
剩磁 $B_r$ Residual magnetic flux density	mT	25°C		180
		100°C		60
矫顽力 $H_c$ Coercive force	A/m	25°C		13
功耗 $P_{cv}$ Power loss	kW/m <sup>3</sup>	100kHz 200mT	25°C	600
			60°C	400
			100°C	270
			120°C	380
居里温度 $T_c$ Curie temperature	°C			230
电阻率 Resistivity	$\Omega \cdot m$	25°C		4
密度 $d$ Density	kg/m <sup>3</sup>	25°C		$4.9 \times 10^3$

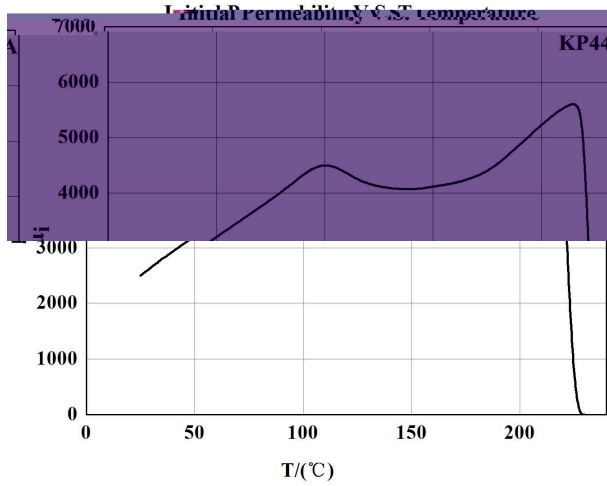

以上数据是根据标准样环  $\phi 25 \times \phi 15 \times 7.5$  获得的典型数据，有关产品的具体性能会在此基础上有所调整。

The above typical data are calculated from the standard toroid core. Specific performance of the product will be adjusted on this basis.